

WiFi Expansion Module



Feature


- Modular design, adds wireless connectivity to HMI.
- WiFi standards supported include: IEEE 802.11b/g/n.
- Compact design and little protrusion when installed on HMI, which avoid space issue in control cabinet installation.
- The magnetic mount antenna included in the package can be installed at an optimal location to maximize signal strength.




Demo for use with HMI
(HMI needs to be purchased separately)

Network	WiFi	IEEE 802.11 b/g/n
		802.11b: max 19.76 dBm
I/O Port	SMA Female Connector	1
	Male Connector to HMI	1
Power	Input Power	5VDC
	Power Consumption	900mA@5VDC (powered by HMI)
	Voltage Resistance	500VAC (1min.)
	Isolation Resistance	Exceed 50MΩ at 500VDC
Specification	PCB Coating	N/A
	Enclosure	Plastic
	Dimensions WxHxD	54.5 x 80 x 24.1 mm
	Weight	Approx. 80 g
	Mount	HMI connector + diagonal screw fastening
Environment	Protection Structure	M02: IP20 Compliant
	Storage Temperature	Antenna: IP66 Compliant
	Operating Temperature	-20° ~ 60°C (-4° ~ 140°F)
	Relative Humidity	0° ~ 55°C (32° ~ 131°F)
	Vibration Endurance	10% ~ 90% (non-condensing)
Certificate	CE	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
	UL	CE marked
Software		cULus Listed
		EasyBuilder Pro

Dimensions

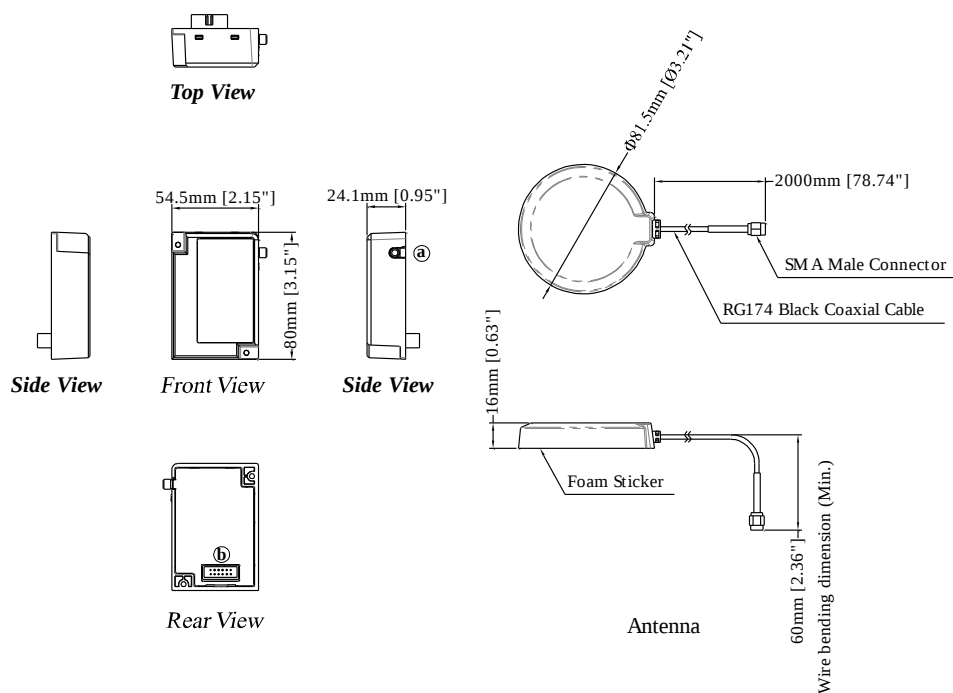

Installation

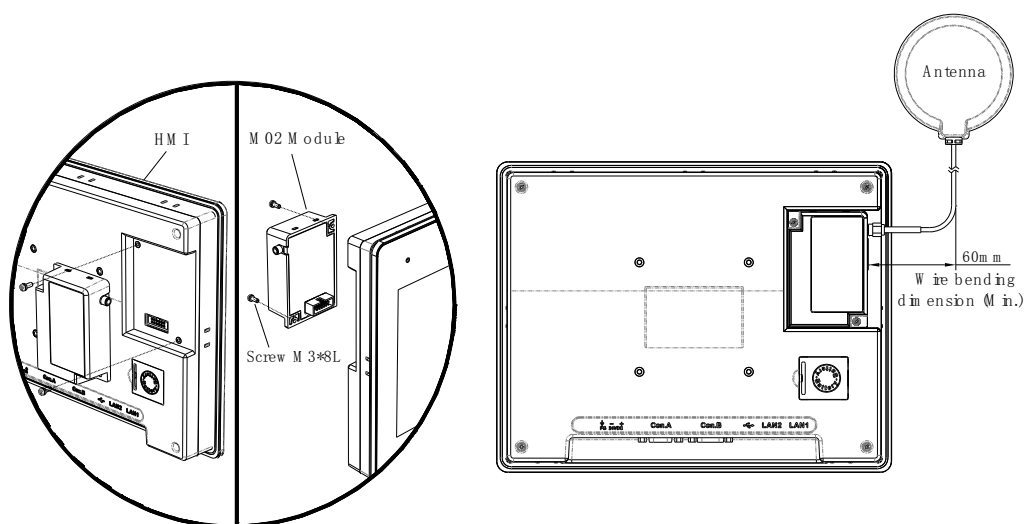

a.	SMA Female Connector
b.	Male Connector to HMI

Ordering Information

- ❑ M02: WiFi Expansion Module
- ❑ RZ0W00100 (included in package): Magnetic Mount Antenna 2.94dBi, IP66, SMA Male connector, wire length: 2000mm